



Product introduction of AOT-PA-3000

Specifications:




AOT-PA-3000

Ozone Output	: 3000mg/H @12 L/min, RH 20% ,25 °C dry air
Application	: Water /air /medical treatment
Power	: 110/220VAC, 90W
Size	: 382 x 203 x 234 mm
Weight	: 8 kg
Working mode	:24 hours running or timer cycle
Warranty	: 1 year from shipment date

Spare Part:

Silicone tube	: 2 meters
Diffuser stone	: 1 pc
Power cable	: 1 pc
User manual	: 1 pc

Details:

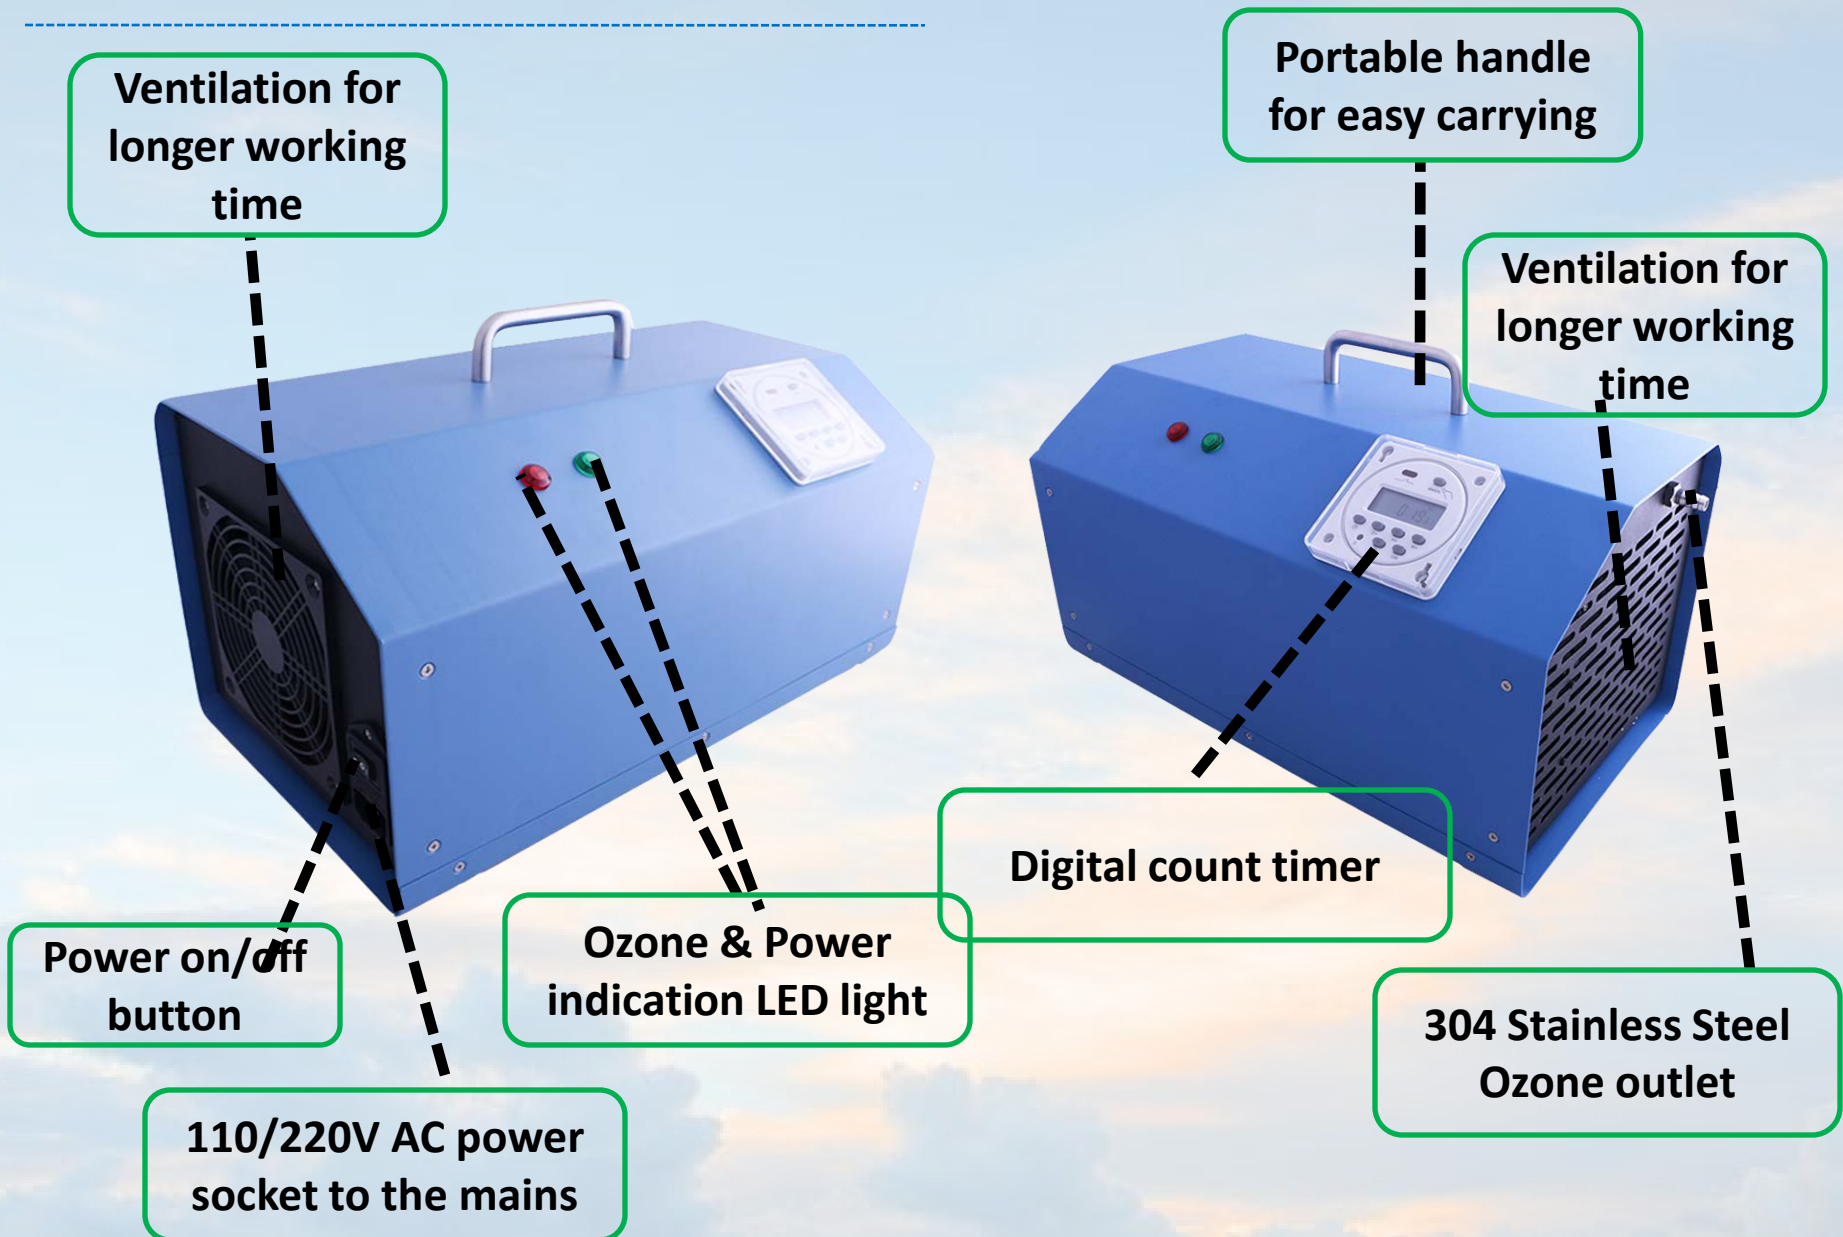

Product Advantage:



Perfect performance:

We use quartz tube and 316SS electrode with precise air gap to generate ozone , a big cooling area would help a lot to work continuously . Moreover , good sealed design with ozone resistance material is good for collect high Concentration ozone and work for all kinds of air /water/ medical treatment.

Long working life:

The electronic part is develop from German office with our Italy partner , compare with traditional technology, our ozone generator withstand life testing for more than 5 months.





Optional timer function:

We built-in 2 working mode of this ozone system, one is 24 hours working , the other one is with timer setting . The timer is digital count type, a Lithium battery inside could reserve power for 3 years.

Strong cooling system:

This ozone generator is with a strong cooling fan in it, the ball bearing fan is a good choice for ozone system, dislike cheap sleeve bearing fan has a short life.



Application:

1.



2.



3.



4.



5.



6.




7.



8.



Company show:

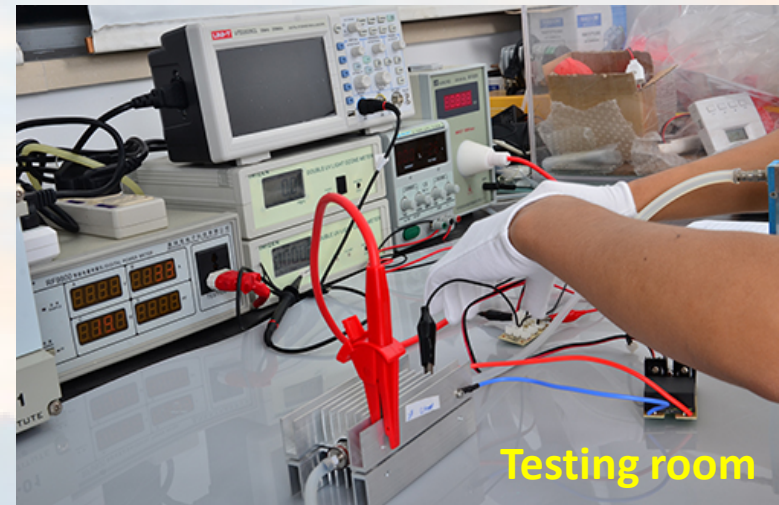

Equipment:



Quartz tube meter



Ozone monitor 0-4000PPM

Ozone monitor 0-0.5PPM




Ozone monitor 0-200mg/L

Equipment:



Power meter

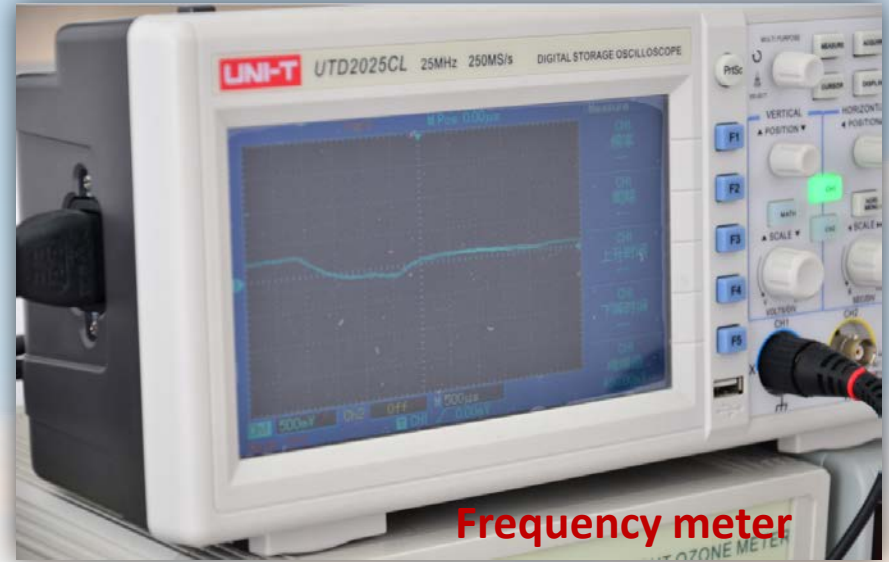

Frequency meter



High voltage meter



Power supply

Thank you



AQUAPURE (Shenzhen) Ozone Technology Co., LTD

Add: R1102, University Town Business Park, Lishan Road, Taoyuan, Nanshan, 518055 Shenzhen, China

Office : 0086-755-2660 5963

Email: info@aquapureasia.com

Website: www.aquapureozone.com