

# User Manual

## AOT-PA-2000




Aquapure Ozone generator is able for water and air treatments, it could be improved the air quality, killing bacterial, stopping mold growing and removing odours, ect. This model uses the latest Quartz & Stainless Steel Tube technology which is best suited for use with ambient air. Ozone Generator, the machine can be widely applied in varied industry for sterilizing and disinfecting , removed of odours & smells etc. You can save lots of costs as they have long life and high performance.

## ➤ Specification

Model No.	AOT-PA-2000
Ozone output	2 g/h at 10 L/min (Temp. : 20°C~ 25°C Humidity : < 20 % RH)
Cooling System	120*120*25cooling fan 73.3CFM
Generator	stainless steel electrode with quartz tube
Ozone Technology	Corona Discharge
Input Voltage	110/220 VAC, 50Hz/60Hz
Rated Power	65W
Operating Temperature	-10°C~ 40°C
Storage Temperature	-20°C~ 70°C
Size(L x W x H)	280*138.5*173 mm
Installation Way	Portable with handle
Weight	6kg with package
Accessories	1pc power cable; 1pc diffuser stone; 1pc silicone tube; 1pc User's Manual

## ➤ Structure

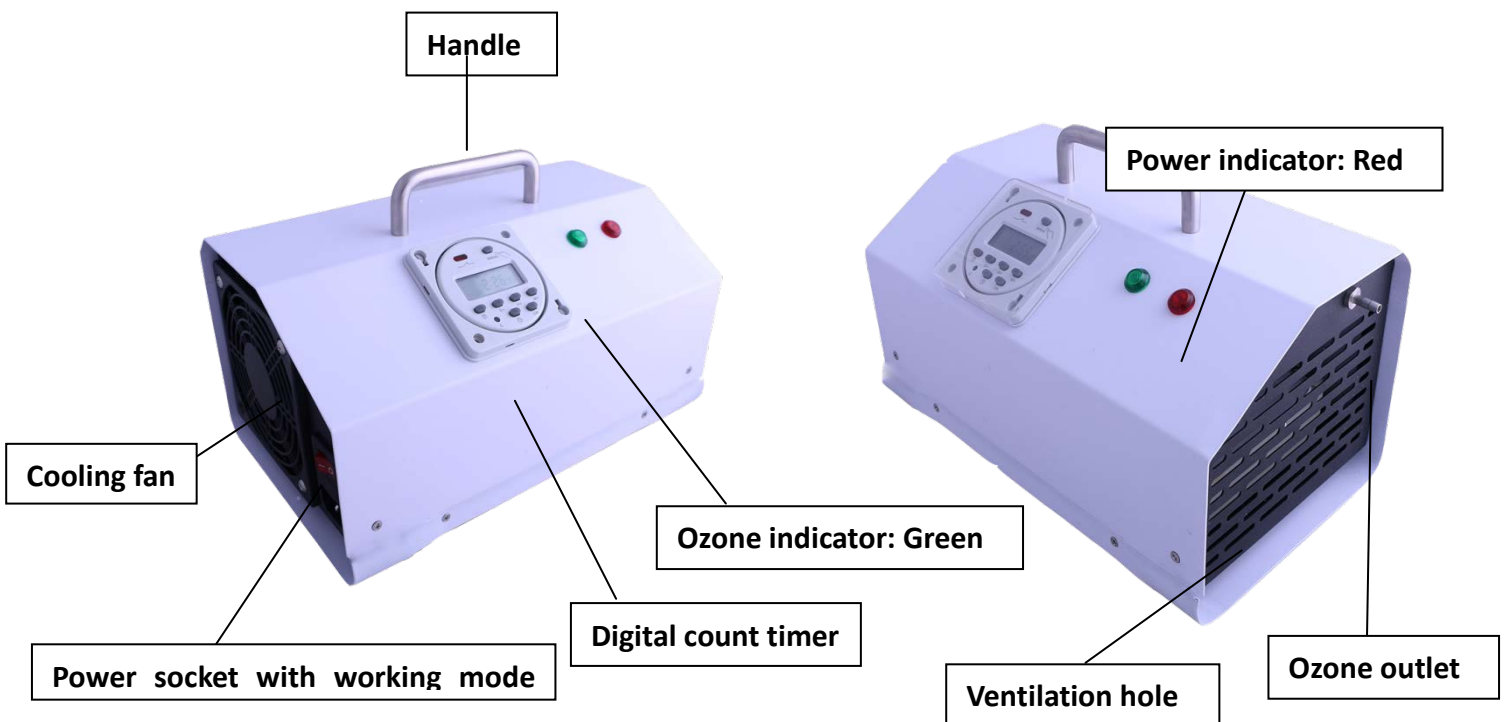

## ➤ Operation


1. Take out the appliance from the package
2. Put the machine on a flat area
3. Connect the cable to the appliance, plug in to the socket to connect to the


mains

4. Power indicates “Red”, Ozone indicator turns “Green” when the appliance is working. There are 2 modes optional:

a) Continuous work: Press I; b) Timer work: set the timer according to your requirement, press II

Timer operation: the timer setting must be finished within 1 minute, otherwise will reset again

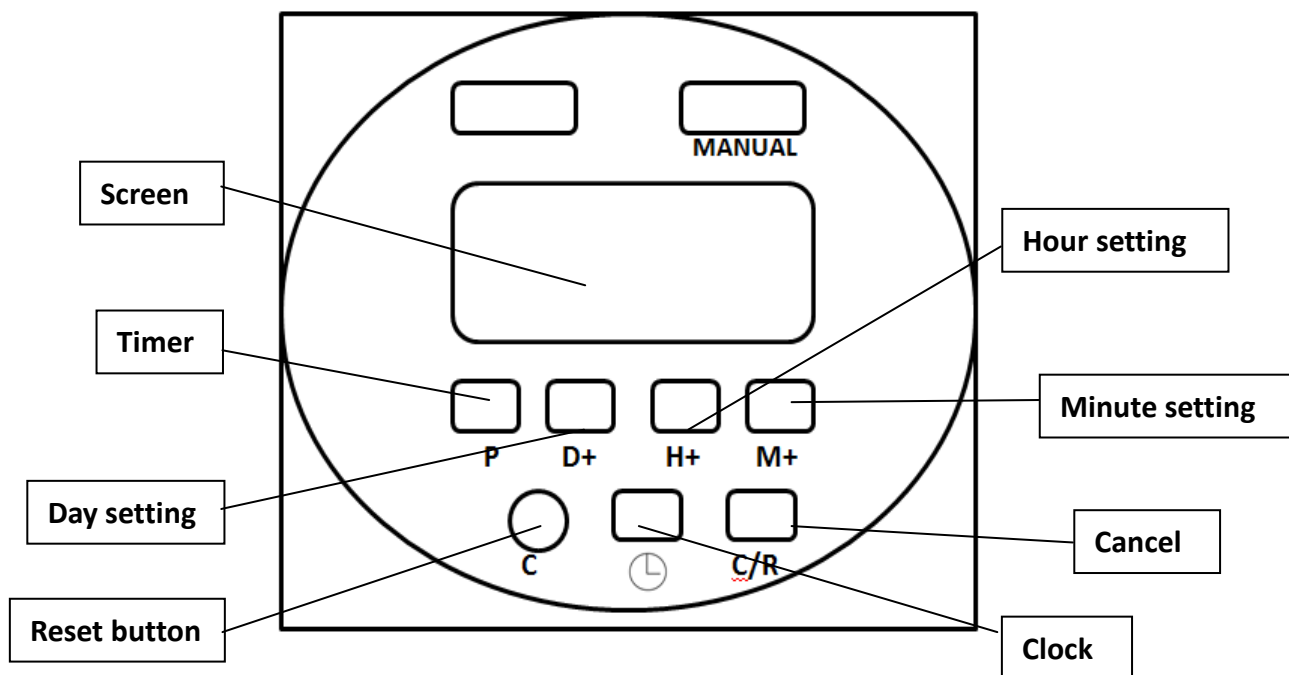

Step	Key	Programming
One	Press C	Reset button: use a small stick to press it
Two	Press P	Timer button: set the startup time
Three	Press M+	Minutes button: press 1 times of M+ button, means the machine will start to work after 1 minute later, press 2 times of M+, start 2 minutes later
Four	Press P	Reset button again, set the working time
Five	Press H+/M+	Hour and minutes button: if you set the machine work for 5 minutes, press 6 times of M+ button, means works 5 minutes, based on the setup time is 1 minute; if you set the machine work for 1 hour and 30 minutes, press 1 time H+ button and 31 times M+ button, based on the setup time is 1 minute
Six	Press 	Confirm the setting time, power light and ozone light on and start to produce ozone

5. Unplug the machine after finish cleaning, put the machine in safety place.

## ➤ Safety and Cautions:

1. Make sure that all accessories are attached in the box and the appliance is in good condition when it is received. Always keep the appliance flat area;
2. Do not store the appliance in a humid place;
3. Do not clean this appliance using a damp cloth when it is working;
4. Operate the appliance in a precondition within -10°C ~ 40°C & 0 ~ 70% RH;
5. When use the ozone generator for air treatment, people are ALWAYS NOT ALLOWED to stay in the space where this appliance is working due to the strong oxidizing of ozone;
6. Do disconnect the adapter before opening the housing or any maintenance;
7. It is not recommended to switch on & off frequently on this appliance. To avoid any defective, please re-switch on the appliance at least 2mins after switching off;
8. Do not block the ventilated fan and outlet of the appliance all the time;
9. Turn off this appliance and unplug the cable immediately when there is ozone leakage inside the housing. A space with ventilation is preferable to stay when this happens;
10. It is not preferable to operate the appliance in flammable or explosive places. Do be more careful if it is necessary;
11. Pack the appliance into a box if it is not going to use for a long while.

## ➤ FAQ

Queries	Answers
Power indication light doesn't work after plugging the cable to the mains power socket	<ol style="list-style-type: none"> <li>a. if the cable is well connected to the appliance or not;</li> <li>b. if the cable is in good condition or not;</li> <li>c. unplug the cable and open the appliance, check if the wire of power connector is in good condition or not;</li> <li>d. ask for help from whom is responsible for.</li> </ol>
No ozone comes out when the appliance is on, and the power and ozone indication light is on as well	<ol style="list-style-type: none"> <li>a. if the fan is working or not</li> <li>b. unplug the cable and open the appliance, check if the connection inside is in good condition or not</li> <li>c. if the quartz tube of the ozone generator module is broken or not</li> <li>d. change the ozone generator module or ask for help from whom is responsible for.</li> </ol>
Who is allowed to operate the appliance	People who are trained or with relevant knowledge of ozone appliance

## ➤ Maintenance Service

1. This ozone generator is warranted to be free from all defects in material in normal household use for a period of (1) year from date of purchase.

2. The warranty is guaranteed only to the original purchaser and members of his or her immediate household. The warranty is subject to the following provisions. Any damages or malfunctions caused by negligence, abuse, or not operate in accordance with the User's Manual are not covered by this warranty. Also, any defects or damages caused by unauthorized service or the use of other than Genuine parts are not covered.

3. Aquapure will, at its option, repair or replace a defective ozone generator or part(s) for the unit that is covered by this warranty. As a matter of warranty policy, Aquapure will not refund the customer's purchasing price. Please recorder the following Warranty Card when you purchase the unit from our company or the distributor.

4. To obtain warranty service you must return the defective ozone generator or its parts along with proof of purchasing to our company or any Authorized Warranty Station. All transportation charges on parts, or units, submitted under this Warranty shall be borne by purchase.